

FLASHLINK

3GHD-OE-L-SFP

3G/HD/SD-SDI optical to electrical converter

The Flashlink 3GHD-OE-L-SFP is a SFP based multi bit-rate optical to electrical long haul converter providing high performance media conversion.

This converter supports 3G-, HD- and SD-SDI signal formats in addition to DVB-ASI, SMPTE 310M and MADI. The modular design – with the ability to quickly replace a whole unit – makes the 3GHD-OE-L-SFP the first choice for mission critical applications. The product is ideal for long haul applications because of its high quality SFP based optical APD receiver. The standards compliance of Nevion Flashlink products allows for easy interoperability with third party fiber optical systems.

The 3GHD-OE-L-SFP unit features six electrical outputs, which reduces the need for additional DA's.


On board DIP switches give access to most configuration parameters allowing the unit to be used in stand-alone applications.

Applications

- Dark fiber contribution
- In-house networks
- Campus networks
- Broadcast studio infrastructure
- Optical video networks

Key features

- Optical sensitivity
 - < -30dBm for HD-SDI, SD-SDI, DVB-ASI
 - < -28dBm for 3G-SDI
- Electrical 1x6 DA
- SC/UPC optical connector

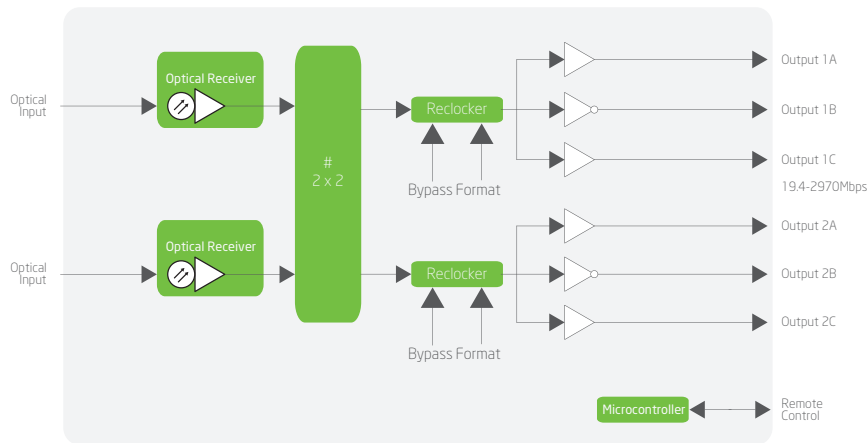

3GHD-OE-L-SFP

The 3GHD-OE-L-SFP is an optical to electrical video converter in the Flashlink range, utilizing Small Form Factor (SFP) modules for optical conversion. The SFP module is placed on the mainboard with a pigtail connection to a SC/UPC connector that is plugged into the backplane. This allows for the mainboard to be removed, with its optics attached, while the fiber connections are still connected to the backplane.

The board supports 3G-SDI, HD-SDI, SDI-SDI and DVB-ASI transport. The auto bypass feature converts other signals between 2Mbps and 3Gbps including MADI.

Most configuration settings can be accessed through eight on board DIP switches.

General

Power	+5V DC / 3.5W, max
Configuration	Multicon GYDA web interface, SNMP, DIP switches, GPI
Monitoring	Multicon GYDA web interface, SNMP, LED, GPI

Supported standards

SD-SDI, 270Mbps	SMPTE 259M, SMPTE 305.2M
HD-SDI, 1485Mbps	SMPTE 292M
3G-SDI, 2970Mbps	SMPTE 424M
ATSC	SMPTE 310M
Fiber transmission	SMPTE 297M
DVB-ASI	EN50083-9

Electrical outputs

Number of outputs	6
Connector	BNC 75 Ohm
Return loss	>15dB @ 5 - 1485MHz >10dB 1485 - 2970MHz
Peak to peak signal level	800mV ± 100mV
Polarity	2 inverting, 4 non-inverting

Optical inputs

Number of inputs	1
Connectors	LC/UPC, single mode
Optical wavelength	~1200 - 1600nm
Optical sensitivity	-28dBm 3G-SDI -30dBm HD/SD-SDI, DVB-ASI
Optical overload	-9dBm
Detector damage threshold	> 0dBm
Receiver type	APD



CONTACT INFORMATION

The Americas

ussales@nevion.com +1 (805) 247-8560

Asia Pacific

asiasales@nevion.com +65 6872 9361

Europe and Africa

sales@nevion.com +47 33 48 99 99

Middle East

middle-east@nevion.com +971 (0)4 3901018

UK

uksales@nevion.com +44 118 9735831

nevion.com

Nevision reserves the right to make changes without notice to equipment specification or design. The information provided in this document is for guidance purposes only and shall not form part of any contract.

© 2013 Nevision. All rights reserved.

