




datasheet

Virtuoso
Media Function

nevion

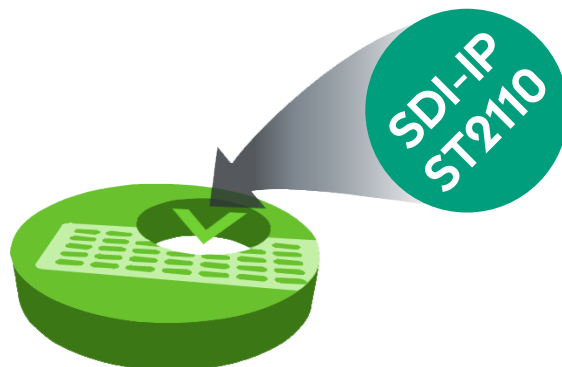

Nevion Virtuoso

SDI-IP UHD/HD ST2110 adaptation

Nevion Virtuoso's SDI-IP UHD/HD Media Function offers a powerful set of video and audio adaptation and processing functions for use in live IP production applications, supporting 12G-SDI and ST2110 on 25GbE.

The SDI-IP-H25 software media function supports dual channel adaptation between SDI and ST2110 for UHD 12G-SDI and HD 3G/HD-SDI signals, with built-in frame synchronization and flexible audio routing/shuffling, gain and delay processing.

A single media function instance running on an HBR25 card in Virtuoso MI supports two SDI-IP or IP-SDI conversions, enabling high density SDI-IP UHD adaptation for up to 16 channels in Virtuoso MI.

The versatility, performance and low latency of the SDI-IP media function makes it ideal for live broadcast and media production applications.


The SDI-IP UHD/HD media function can be combined with other Virtuoso media functions such as Up/Down/Cross conversion, 3D-LUT colour conversion and processing, MAD1 and AES3 audio adaptation, audio processing and mixing, or JPEG XS encoding and decoding.

Applications

- Live production
- IP facility infrastructure
- Distributed production

Key features

- Flexible SDI and IP video/audio connectivity
 - 12G/3G/HD-SDI optical and electrical via SFPs
 - Uncompressed video/audio over IP/25GE
 - SMPTE ST 2110-10/20/21/30/31/40
 - Dual channel SDI-IP, or dual channel IP-SDI
- PTP timing and sync (IEEE 1588v2, SMPTE ST 2059)
- Video/Audio processing
 - Video/audio frame synchronization
 - Audio embedding/de-embedding
 - Audio routing, shuffling, delay and gain
 - Video HDR/SDR signaling, routing and delay
 - Clean video switching (MBB, BBM)
- Stream protection
 - SMPTE ST2022-7 for all RTP media input flows
- Monitoring and control
 - Thumbnails of input and output video
 - Advanced video monitoring option
 - HTML5 user interface for configuration
 - NMOS IS-04/05 and REST API for control

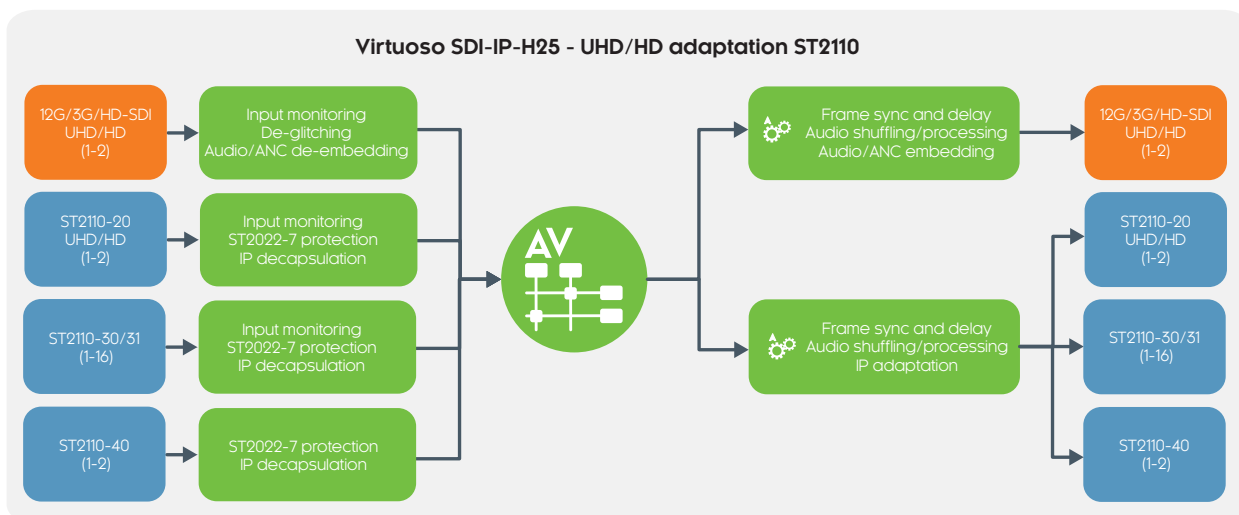

SDI-IP UHD/HD adaptation

Nevion Virtuoso SDI-IP UHD/HD media function inherently acts as a frame synchronizer with legacy SDI and IP video and audio interfaces, supporting any-to-any conversion, audio de-embedding and embedding, video and audio routing/shuffling, delay, and gain control. These features make Nevision Virtuoso ideal for processing audio and video signals in IP-based broadcast facility infrastructure, and for IP remote and distributed production applications.

Flexible interfacing via IP/25GE

The media function is available for the HBR25 accelerator card in the Virtuoso M1 and supports dual 25GE interfaces via SFP28 ports, supporting Nevision or 3rd party SFPs.

PTP timing and sync

Precision Timing Protocol (PTP) provides accurate synchronization for IP video and audio, using IEEE 1588v2 or SMPTE 2059-2 profiles. Locking to PTP/TAI ensures fully synchronous operation across any network and any distance. PTP redundancy is supported with automatic bumpless PTP failover switching.

Audio and video processing

The media function provides de-embedding of audio from SDI and ST2110-30/31 IP audio inputs. Audio channels can be routed to any output, embedded in SDI or sent out on IP as SMPTE 2110/AES67.

Audio delay can be adjusted on a channel-by-channel basis, up to 10 seconds. Audio level/gain can also be adjusted on a per-channel basis.

Test image transmission

The media function can transmit an internally generated color bar or custom test image with configurable text overlays and moving patterns, to allow efficient testing of links prior to a live production.

Network redundancy with ST2022-7

Transmitting the same RTP/IP stream across dual, fully diverse network links enables receivers/decoders to utilize SMPTE ST 2022-7 Seamless IP Protection Switching (SIPS), which gives error-free transport even in case of severe packet loss or link outages as long as a packet arrives on either of the two network links. Support for ST 2022-7 requires the protection license.

Video formats

HD-SDI	SMPTE ST 292/ST 296/ST 274
3G-SDI	SMPTE ST 424 (Level A)/ST 274
12G-SDI	SMPTE ST 2082-1/10 (Mode 1), SMPTE ST 2036-1
IP media interface	SMPTE ST 2110-20/21 (NL sender, W receiver)
Video formats	1280 x 720p: 50/59.94/60 Hz 1920 x 1080i: 25/29.97/30 Hz 1920 x 1080p: 25/50/59.94/60 Hz 3840 x 2160p: 50/59.94/60 Hz

Video processing

Input/output video	YCbCr, 4:2:2,10 bit per component
Colour formats	ITU-R BT.709 (HDTV) ITU-R BT.2020-2 (UHDTV) ITU-R BT.2100 HDR (HLG / PQ)
Legalize / clip	Yes
Frame sync	Yes
Sync reference	PTP (IEEE 1588v2) from 25GE Analog BB/TLS via Virtuoso appliance
Minimum latency	Less than 5 ms (without ref sync)
Video delay	Yes, up to 10 frames additional delay
Test patterns	75% and 100% Bars, SMPTE RP 219, SMPTE EG 1 EIA RS-189-A, EBU TECH-3373 HDR/HLG Flat-field with configurable color Custom test image (JPG/PNG) Configurable text overlay Moving box/bar

Audio and ancillary data formats

Embedded audio	16 channels (8 stereo pairs) Linear PCM 24-bit audio (48kHz) AES3 non-PCM audio 32-bit pass-through
Ancillary data	Pass-through SDI to/from SMPTE ST 2110-40 Single stream per SDI input/output

Video and audio over IP

Video over IP	SMPTE ST 2110-20 video in RTP/UDP/IP SMPTE ST 2110-21 (NL sender, W receiver)
Audio over IP	SMPTE ST 2110-30 PCM audio (Level A+B) SMPTE ST 2110-31 AES3 over IP (Level A+B) AES67 compliant (1 to 8 ch per stream) Up to 16 IP audio input and output flows
Ancillary over IP	SMPTE ST 2110-40 Ancillary Data over IP Up to 2 IP input and output flows

Ordering options

VIRTUOSO-HW-HBR25-SFP3	24645	Nevion Virtuoso 25G High Bit-Rate Accelerator (HW module). 2x25G SFP28 ports. Additional licenses required for use with media adaptation/compression/ processing/monitoring functions.
VIR-MI-SW-UNC-UHD1	24746	License option enabling UHD/HD ST2110 adaptation for one (1) channel. Enables 1 UHD/HD video channel on IP (input or output) and 16 mono audio channels on IP. Max two (2) licenses per HBR25 card.
VIR-MI-SW-UNC-PROT1	24743	License option enabling IP protection features, including SMPTE 2022-7 Seamless IP Protection Switching (SIPS) for RTP/IP transport over dual diverse network links (license only needed on receiver). License for 1 video service.
VIR-MI-SW-UNC-MON1	24740	License option enabling advanced monitoring features for uncompressed video/audio, including black/ freeze frame detection. License for 1 video service.

NMOS support	NMOS IS-04 Discovery and Registration NMOS IS-05 Connection Management NMOS IS-08 Audio Channel Mapping
Link redundancy	Hitless/seamless switching for all RTP flows compliant to SMPTE ST 2022-7:2019 ST2110-20: class A. ST2110-30/31: class C
Clean switching	Break-before-make switching (1-2 frames additional latency) Make-before-break switching

Timing and synchronization

Sync input format	PTP (IEEE 1588v2:2008) Analog BB/TLS via Virtuoso appliance
PTP profile support	PTP default and media profile SMPTE 2059-2 PTP profile
PTP redundancy	Internal PTP failover in Virtuoso MI
Media timing	SMPTE ST 2059-1, SMPTE ST 2110-10 SDI video timing based on SMPTE ST 2059-1
RTP timestamp	Generated based on PTP/ST2110

Monitoring

Thumbnails of video input and output	
Video freeze and black frame detection (licensed)	

Media Server Appliance support

Please refer to Nevion Virtuoso Platform datasheet for details.	
Virtuoso MI	Supported in version 1.6 or higher.

Accelerator requirement

Accelerator	HBR 25G Media Accelerator
Description	Multi-channel high bitrate Media Accelerator (HW module). 2x25G SFP ports. Additional licenses required for use with media adaptation/compression/ processing/ monitoring functions.
Product codes	VIRTUOSO-HW-HBR25-SFP3 (24645)
SFP configuration	Port 1: Video SFP (Dual RX or Dual TX) Port 2: 25GE (25GBase-LR/SR) Port 3: 25GE (25GBase-LR/SR)
Sync input format	PTP (IEEE 1588v2:2008, SMPTE ST2059-2)
Power consumption	Maximum 45W



Nevion near you!

Nevion has a presence in all the major regions, and an extensive network of partners to reach customers anywhere in the world.

Visit our website for your nearest sales contact

[nevion.com](https://www.nevion.com)

Copyright © Nevion, 2022, all rights reserved.

No part of this documentation may be reproduced in any form or by any means or be used to make any derivative work (including translation, transformation or adaptation) without explicit written consent of Nevion.

Nevion reserves the right to make changes without notice to equipment specification or design. The information provided in this document is for guidance purposes only and shall not form part of any contract.